


P3000I HAU

Compact & Lightweight



FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

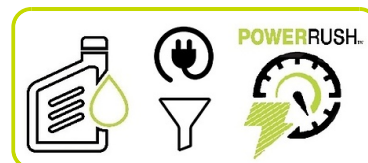

POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. Powerrush increases electrical current upon demand, above rated output when starting electric motors.

PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	2500
Rated Power	Watts	2300



Engine


Engine Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	

Alternator

Voltage regulation system	Inverter
---------------------------	----------

Dimensional data

Length	(L) mm	565
Width	(W) mm	339
Height	(H) mm	467
Dry weight	kg	27
Carton box dimension LxWxH	mm	600x340x525

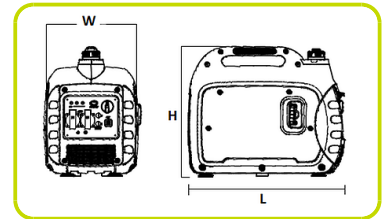

Autonomy

Fuel tank capacity	4	
Fuel consumption 75%	l/h	1.14
Running time 75%	h	3.5



Noise level

Guaranteed noise level (LWA)	dB(A)	88
Noise pressure level @ 7 m	dB(A)	61

GENSET CONTROL

COMMANDS

- Selector switch: O/I • Air choke Valve • Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)
- Parallel kit receptacles

PROTECTIONS

- Overload; Oil Guard; Overvoltage; Overtemperature
- Protection Control panel IP 44

OUTPUT:

- n°2 USB DC 5V 2A

SOCKET TYPE

AS/NZS 3112 15A 250V	2
----------------------	---



For more information call us on:
(07) 5500 6027

PowerMaster
GENERATORS & POWER EQUIPMENT

PRAMAC

The information is aligned with the Data file at the time of download. Printed on 09/05/2022 (ID 15533)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice