

8000 WATT PURE SINE WAVE DIGITAL INVERTER GENERATOR

Maxwatt's digital inverter generators offer the best in portable power, fuel efficiency and are super silent. Besides the electrical output being able to power all sensitive equipment, the MX8000IS is ideal for Food trucks, Coffee vans, Markets and events as well as emergency home back up power. This generator has a rated output of 7000 watts with a maximum output of 8000 watts. The MX8000IS has been designed to complement off-grid solar power systems as it has a pre-installed 2-wire automatic start, run and stop control system.




SUPER SILENT

STANDARD FEATURES:

- Electric start with recoil start as backup.
- 2 Wire Auto start for off grid solar power systems.
- 1 x 32 Amp IP66 weatherproof outlet for maximum power from one outlet.
- 1 x 15 Amp IP66 weatherproof outlet.
- 5V 2.1 Amp USB Outlet.
- 26 l Fuel Tank Capacity.
- 11 Hours continuous running at 50% load and 6 hours at 100% load.
- Smart Engine control that reduces engine speed, depending on the load for better fuel efficiency.
- 2 Year Maxwatt® Warranty.

Control Panel Functions

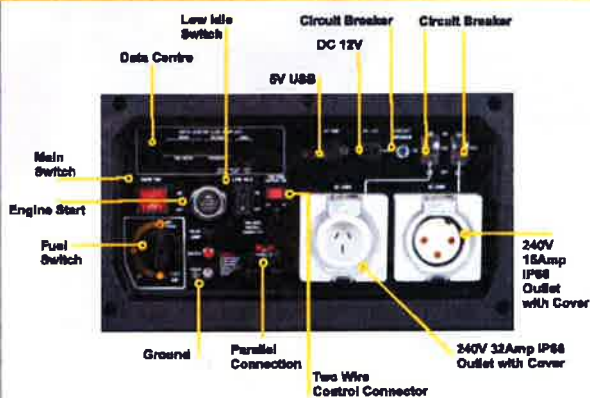

PARALLEL BOX NOT INCLUDED

DOUBLE POWER
WITH PARALLEL CONNECTIVITY

8000W
MAXIMUM RATED OUTPUT



2
YEAR
WARRANTY
MX8000IS

ADDITIONAL FEATURES AND BENEFITS

- Digital Inverter Technology
- Pure sine wave inverter technology
- Low Noise at 68DB
- 2.1 AMP USB Output
- Economy Low Idle Setting
- Smart Engine Control that reduces engine speed, depending on size of the load for better fuel efficiency.
- 8000W maximum output is one of the highest in its class that enables it to efficiently power up multiple electrical devices.
- Portable at only 105kgs.
- It has a non-slip and ergonomically designed handle.
- The running time at 11 hrs at 50% load and 6 hrs at 100% load is achieved with the help of a 26 litre fuel tank.
- The pure sine wave technology not only safely powers sensitive equipment, it is also compliant with Australian EPA emission controls.
- It is a no fuss generator that is simply plug in and use – no assembly required.
- We offer a 2 year warranty to safeguard your investment.

SPECIFICATIONS

Voltage (V)	240
Amperage (A)	29.16
Displacement (cc)	459
Fuel Tank Capacity (L)	26
Noise Level (db's) at 7 m	68
Rate Power (watts)	7000
Max. Power (watts)	8000
Weight (net) (kg)	105
Ignition	Electric / Recoil Start
Rate Frequency (Hz)	50
Running Time @ 50% Load (hrs)	11
Running time @ 100% load (hrs)	6

REPAIRS AND TECHNICAL INFORMATION

www.maxwatt.com.au
customercare@maxwatt.com.au

info@powermastergenerators.com.au
Call us on (07) 5500 6027



Generator Dimensions:

770mm L
610mm W
730mm H
105kg Weight

Box Dimensions:

820mm L
640mm W
780mm H
118kg Weight

2
YEAR
WARRANTY