



FIRE FIGHTING - IRRIGATION - WATER TRANSFER - TRASH

MYD15HPE

This 1.5" Diesel Firefighting Pump is a rugged and versatile model. The high quality Yanmar diesel engine drives a powerful, heavy duty, single-impeller pump. The pump housing, fittings and impeller are all made from durable cast-aluminium.

The impressive performance ensures it is a great choice for firefighting as well as other applications such as water transfer, wash down and irrigation. Diesel powered pumps offer greater efficiency, long life times and can be safer due to the lower volatility of the fuel compared to petrol pumps.

The great performance and high quality Australian manufacturing make the MYD15HPE an excellent choice for a diesel powered, firefighting pump.




OPTION

FFK01-B

1 x Delivery hose 3/4" x 6m with fire spray nozzle and
1 x Suction hose 1.5" x 4m with strainer.



MYD15HPE PUMP PERFORMANCE CURVE

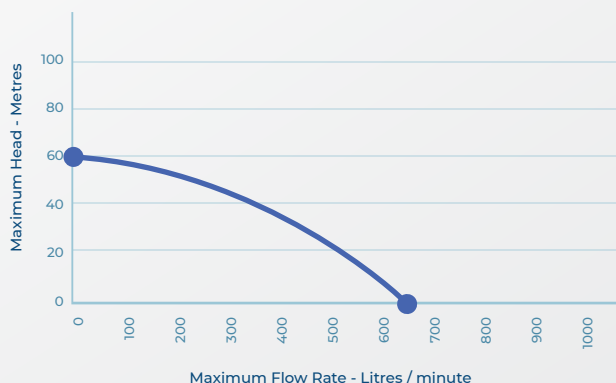

TECHNICAL SPECIFICATIONS:

Engine	: Yanmar L70N
Starting System	: Recoil / Electric
Fuel Tank Capacity	: 3.3 L
Suction Size	: 1.5"
Discharge Size	: 2 x 1" & 1 x 1.5"
Max. Head	: 60m
Max. Flow Rate	: 640 L/min
Fuel Type	: Diesel
Dimensions (L x W x H)	: 760 x 515 x 550 mm
Dry Weight	: 70 kg
Self Priming	: Yes

Specifications subject to change without notice.

SPECIALISTS IN DESIGNING TOUGH PUMPS FOR AUSTRALIAN CONDITIONS

(07) 5500 6027 powermastergenerators.com.au

* Specifications are subject to change without notice. Images are for display purposes only. Product may differ from images displayed. Performance data has been measured at the pump. The performance of our Pumps as noted above can be affected by the installation and configuration of the pipe work and distances involved. Example - suction head, static head, friction head. Which all need to be considered when determining the appropriate pump size.